
# 

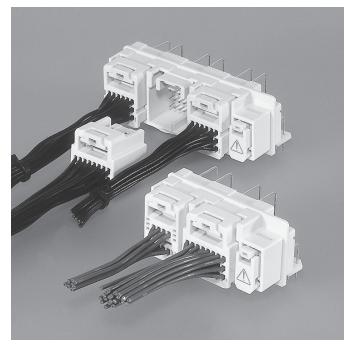

The miniaturization is realized as air-bag ECU I/O connector for automobile.

This product has various circuit development and several adoption results proven, hence it enables to select the type to meet the automobile.

### Board-to-wire


#### Features

#### •Incomplete mating detection mechanism

Mis-insertion and insertion error at the assembly line can detect with a CPA terminal.

#### Terminal construction

It is designed to prevent the deformation of the contact area when processing wire harness by protecting the contact area of each terminal with a box.

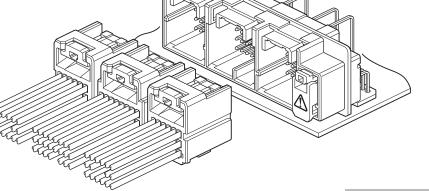

#### Specifications

- •Current rating: 5 A AC, DC (0.5 mm<sup>2</sup>, Single circuit)
- Voltage rating: 50 V AC, DC
- ●Temperature range: -40°C to +105°C

(including temperature rise in applying electrical current)

- •Contact resistance: Initial value/ 8 m $\Omega$  max. After environmental tests/ 16 m $\Omega$  max.
- •Insulation resistance: 100 M $\Omega$  min.
- •Withstanding voltage: 100 VDC/minute
- •Applicable wire: AVSS/CAVS

0.64 Terminal S; 0.3 mm<sup>2</sup> to 0.5 mm<sup>2</sup> CHFUS


0.64 Terminal SSS/SS; 0.13  $\rm mm^2$  to 0.35  $\rm mm^2$ 

\* Compliant with ELV/RoHS.


\* Contact JST for details.

1 **JST** 



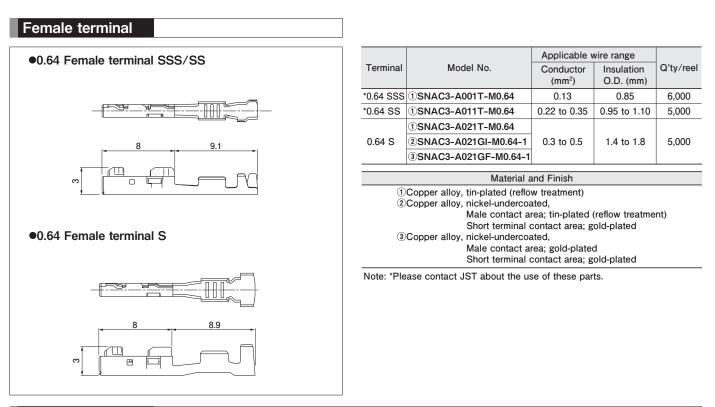


#### Female connector

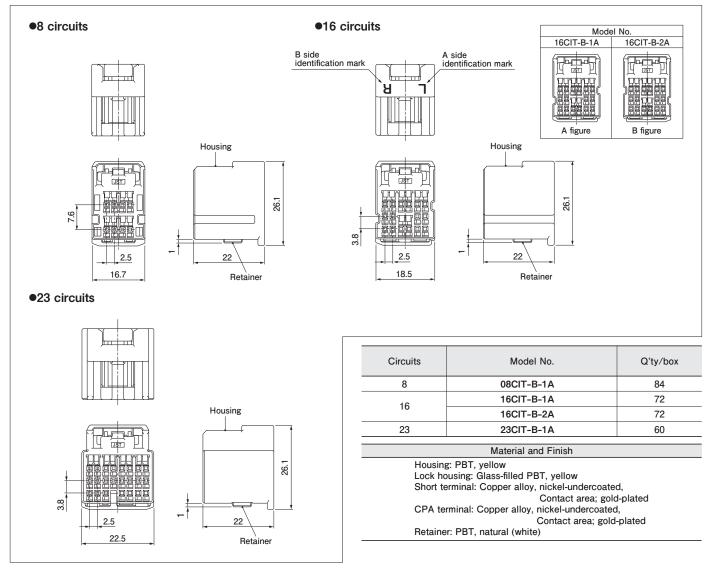


## **CIT** CONNECTOR

#### Male connector

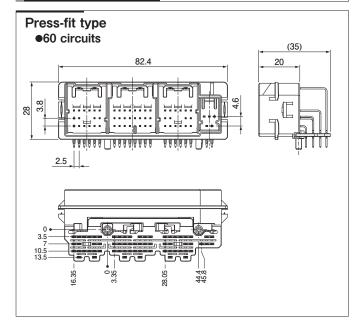

Circuits	Model No.	Q'ty/box				
60	S60B-CITYTP-P-04B	60				
Material and Finish						
0.64 pin(S, M): Phosphor bronze, nickel-undercoated, tin-plated (reflow treatment) 0.64 pin(L): Phosphor bronze, nickel-undercoated, Contact area; gold-plated Press-fit area; tin-plated (reflow treatment)						
1.0 pin(S, M): Phosphor bronze, nickel-undercoated, tin-plated (reflow treatment) CPA pin: Phosphor bronze, nickel-undercoated, Contact area; gold-plated Press-fit area; tin-plated (reflow treatment)						
Housing: Glass-filled PBT, yellow						
Tine-plate: Glass-filled PBT, natural (white) Protect cap: PBT, yellow						

#### PC board layout, Assembly layout

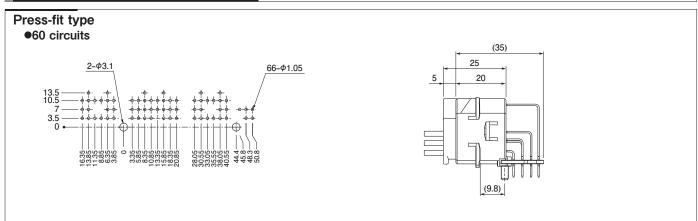

Press-fit type

Note: 1. Tolerances are non-cumulative: 0.05 mm for all centers.2. Hole dimensions differ according to the type of PC board and piercing method. The dimensions above should serve as guideline. Contact JST for details.

#### Crimping machine, Applicator, Hand crimp tool

Strip terminal	Crimping machine	Crimp applicator MKS-L		Hand crimp tool	Applicable wire
		Dies	Crimp applicator with dies	Hand chinp tool	Applicable wile
SNAC3-A001T-M0.64	AP-K2N	MK/SNAC3-A001-064	APLMK SNAC3-A001-064	—	—
SNAC3-A011T-M0.64		MK/SNAC3-A011-064	APLMK SNAC3-A011-064	—	—
SNAC3-A021T-M0.64		MK/SNAC3-A021-064 APLMK		YRK-1003	AVSS0.5, CAVS0.5
SNAC3-A021GI-M0.64-1			APLMK SNAC3-A021-064	—	—
SNAC3-A021GF-M0.64-1				—	_

Note: When crimping operation is conducted using an applicator and die set other than the above, JST cannot guarantee the performance of the terminal.