



艦船用先開形絶縁筒付圧着端子AT

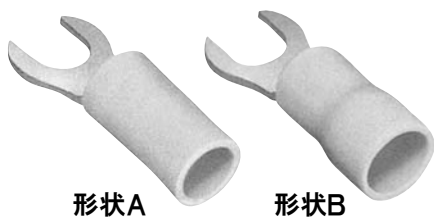

形状A

形状B

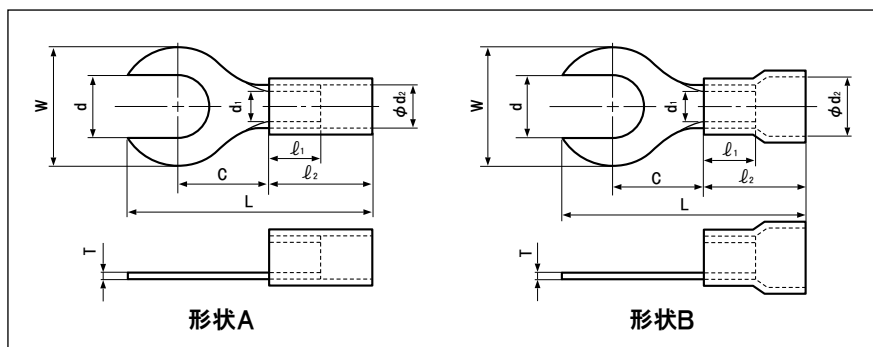

形状A

形状B

形番		形状	適用電線		寸法(mm)									色	1箱入数(個)
NDS	JST		断面積(mm ²)	絶縁体の最大仕上り外径	W	C	L(最大)	l ₁ (最小)	l ₂	d	d ₁	φd ₂ (最小)	T		
AT1-A10	V1.25-MS3X	A	0.4	3.05	5.5	5.6	17.6	4.4	9.0	3.2	1.7	3.1	0.8	赤	1,000
AT1-A20	-				8.0	7.0	20.2			4.3					
AT1-A30	V1.25-5X						19.8			5.3					
AT1-B10	FV1.25-MS3X	B	1.4	3.90	5.5	5.6	17.6	4.4	9.0	3.2	1.7	4.0	0.8		
AT1-B20	FV1.25-4X				8.0	7.0	20.2			4.3					
AT1-B30	FV1.25-5X						19.8			5.3					
AT2-A10	V2-MS3X	A	2.0	3.56	5.5	5.6	17.6	4.4	9.0	3.2	2.3	3.6	0.8	青	1,000
AT2-A20	V2-4X				8.5	7.8	21.2			4.3					
AT2-A30	V2-5X						21.0			5.3					
AT2-B10	FV2-MS3X	B	4.32	4.32	5.5	5.6	17.6	4.4	9.0	3.2	2.3	4.4	0.8		
AT2-B20	FV2-4X				8.5	7.8	21.2			4.3					
AT2-B30	FV2-5X						21.0			5.3					
AT3-A30	V5.5-5X	A	3.5~5.5	5.08	9.5	8.3	26.5	6.4	13.5	5.3	3.4	5.2	1.0	黄	500
AT3-B30	FV5.5-5X	B		5.84								6.6			

注1) 絶縁物にはビニルを使っています。

注2) 本製品の中には多少納期を要するものもあります。