



# BUTTON CONTACT

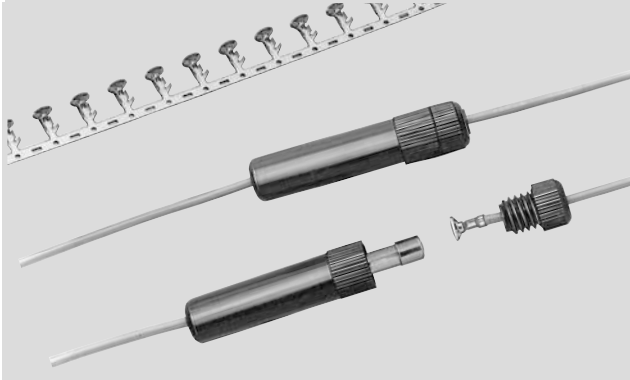

This is a connection component to be incorporated into lamp sockets and fuse holders, and has excellent reliability and workability compared to conventional soldering types, and is widely used in automobiles.

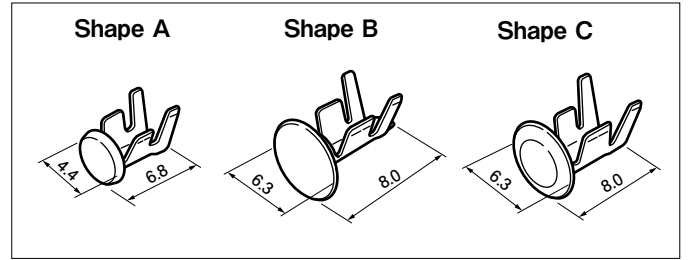

Model No.	Applicable wire			Shape	Surface finish	Q'ty/reel
	mm <sup>2</sup>	AWG#	Insulation O.D. (mm)			
SBT-31-001	0.5 to 0.85	20 to 18	2.1 to 3.0	A	—	7,500
SBT-31T-001					Tin-plated	
SBT-31T-002				B	Tin-plated	10,000
SBT-31T-003	C	Tin-plated				

Material

Brass

#### RoHS2 compliance

Note: The SBT-31 (T)-003 has a dent at the end to increase the area that contacts the mating fuse.

The SBT-31 (T)-002 does not have such a dent.

#### Crimping machine, Applicator

Contact	Crimping machine	Applicator	Crimp applicator with dies
SBT-31(T)-001	AP-K2N	MKS-L	APLMK SBT31-001
SBT-31(T)-002			APLMK SBT31-002
SBT-31(T)-003			

Note: Contact JST for fully automatic crimping applicator.

- \* In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- \* RoHS2 compliance
- \* Dimensional unit: mm
- \* Contact JST for details.