


LV CONNECTOR

8.0 mm pitch/For Wire-to-Board connection/Crimp style and Mating style

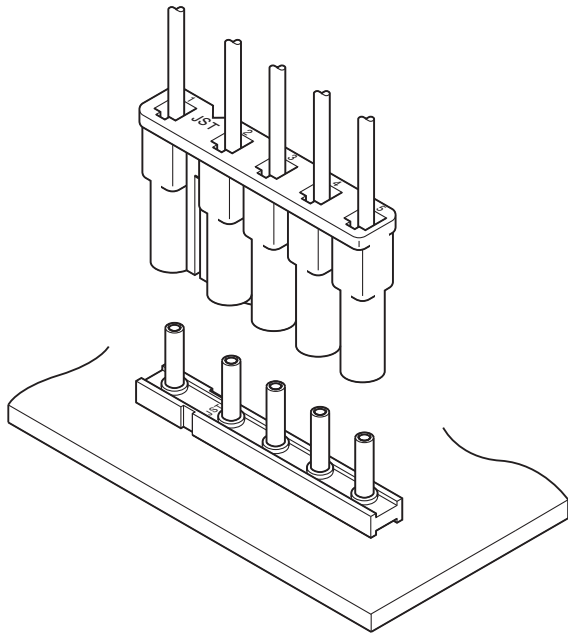

This is a large pitch board-to-wire connector with 8.0 mm spacing between pins suitable for power supply applications in various household electrical and electronic equipment.

■ Features

• 3 contact point design between header pin and contact when mated.

This 7 mm length pin has a triangular configuration whereby the contact mates with the header pin at three different points. With a header pin diameter of 2.36 mm, this connector provides stable contact performance with currents up to 7 A. The mated contact area has a self-protective design to prevent performance deterioration due to excessive external forces from improper handling related prying insertion and removal.

• Connector polarization to prevent mismatching

The pitch between positions 1 and 2 on the header with 3 or more pins is 10.0 mm while the remaining positions have 8.0 mm pitch.

• Flux entry prevention

The solder end of the hollow pin is closed so as to completely prevent flux or solder from entering. The pin is tightly press-fit into the header insulator to prevent flux from coming up the pin.

Note: This feature applies to TN type LV header with hollow pins. TA type LV header comes with solid pins.

■ Standards

Ⓜ : Recognized E 60389

Ⓢ : Certified LR 20812


⚠ : R75121

■ Specifications

- Current rating:
 - SVF-01T-2.36N: 5 A AC/DC (AWG #20)
 - SVF-01T-2.36LN: 7 A AC/DC (AWG #18)
- Voltage rating: 250 V AC/DC
- Temperature range: -25°C to +85°C
(including temperature rise in applying electrical current)
- Contact resistance:
 - Initial value/ 10 mΩ max.
 - After environmental tests/ 20 mΩ max.
- Insulation resistance: 1,000 MΩ min.
- Withstanding voltage:
 - There shall be no breakdown or flashover while applying 1,500 VAC for one minute.
- Applicable wire range:
 - SVF-01T-2.36N :
 - Conductor size/ AWG #24 to AWG #20
 - Insulation O.D./ φ 1.4 mm to φ 2.7 mm
 - SVF-01T-2.36LN :
 - Conductor size/ AWG #24 to AWG #18
 - Insulation O.D./ φ 1.4 mm to φ 2.9 mm
- Applicable PC board thickness: 1.6 mm
- * In using the products, refer to "Handling Precautions for Terminals and Connectors" described on our website (Technical documents of Product information page).
- * RoHS2 compliance
- * Dimensional unit: mm
- * Contact JST for details.

LV CONNECTOR


Contact

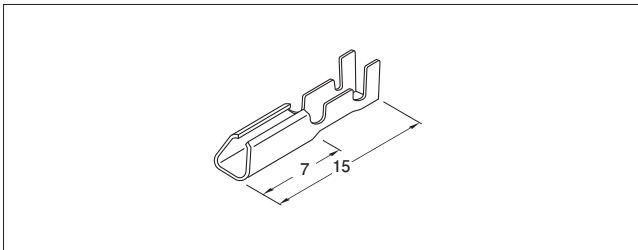

Model No.	Applicable wire range		Q'ty/ reel
	Conductor size AWG (mm ²)	Insulation O.D. (mm)	
SVF-01T-2.36N	#24 to #20 (0.2 to 0.5)	1.4 to 2.7	15,000
SVF-01T-2.36LN	#24 to #18 (0.2 to 0.83)	1.4 to 2.9	5,000

Material and Surface finish, etc.			
Phosphor bronze, tin-plated			

Housing

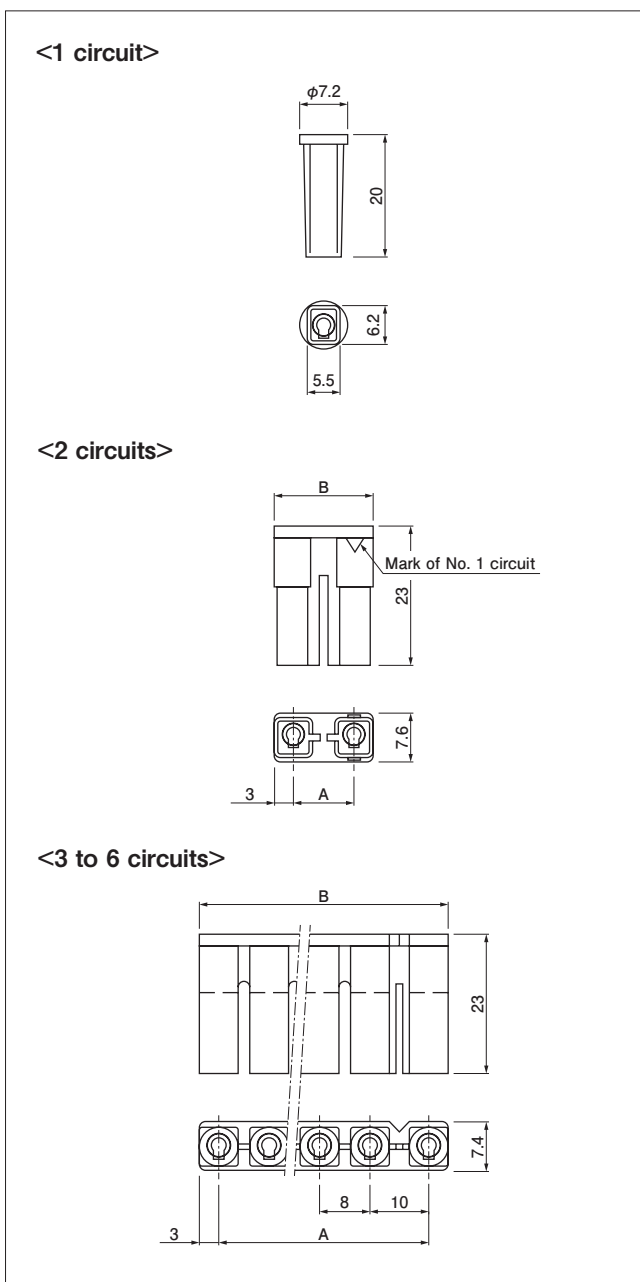


No. of circuits	Model No.		Dimensions (mm)		Q'ty/bag
	Modified PPE	PBT	A	B	
1	S1P-LV	S1P-LV-P	—	—	1,000
2	2P-LV	2P-LV-P	10.0	16.0	
3	3P-LV	3P-LV-P	18.0	24.0	500
4	4P-LV	4P-LV-P	26.0	32.0	
5	5P-LV	5P-LV-P	34.0	40.0	
6	6P-LV	6P-LV-P	42.0	48.0	

Material and Surface finish, etc.					
S1P-LV, () P-LV: Modified PPE, UL94V-0, gray					
S1P-LV-P, () P-LV-P: PBT, UL94V-0, black					

Note: Caution during use
 Modified PPE is an engineering plastic with various excellent physical properties. However, it is vulnerable to organic solvents (toluene, benzene, carbon tetrachloride, gasoline, etc.). Therefore, please avoid using modified PPE products in environments where organic solvents are present.

Header

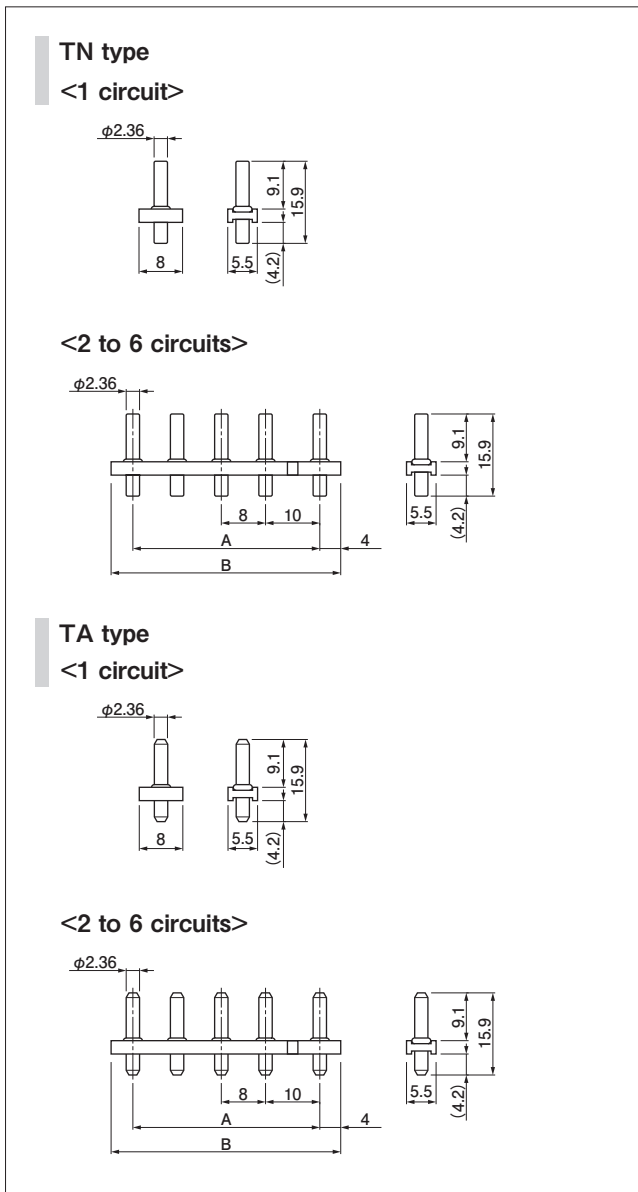

Type	No. of circuits	Model No.	Dimensions (mm)		Q'ty/box	Applicable contact
			A	B		
TN type	1	B1P-LV-TN	—	—	1,000	SVF-01T-2.36N
	2	B2P-LV-TN	10.0	18.0	500	
	3	B3P-LV-TN	18.0	26.0	500	
	4	B4P-LV-TN	26.0	34.0	250	
	5	B5P-LV-TN	34.0	42.0	200	
	6	B6P-LV-TN	42.0	50.0	200	
TA type	1	B1P-LV-TA	—	—	1,000	SVF-01T-2.36N
	2	B2P-LV-TA	10.0	18.0	500	SVF-01T-2.36LN
	3	B3P-LV-TA	18.0	26.0	500	SVF-01T-2.36LN
	4	B4P-LV-TA	26.0	34.0	250	
	5	B5P-LV-TA	34.0	42.0	200	

Material and Surface finish, etc.

Pin :


TN type: Brass, nickel-plated

TA type: Brass, Nickel-undercoated, tin/copper alloy-plated

Wafer: PA 66 (Glass-filled), UL94V-0, natural

Note: TA type products display (LF) on a label.

PC board layout and Assembly layout

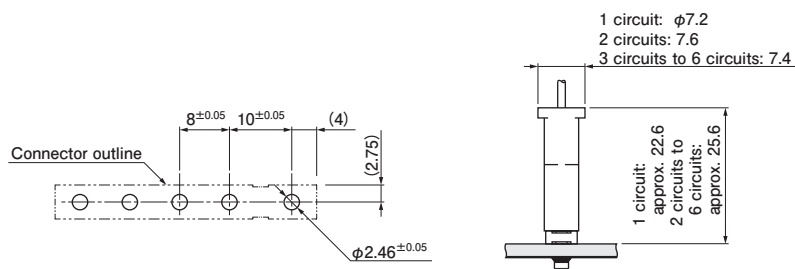

- Note: 1. The figure of PC board layout is the figure viewed from the connector mounting side.
 2. Tolerance for PCB hole pitch shall be ± 0.05 and shall not accumulate.
 3. Hole dimensions differ according to the type of PC board and piercing method.
 The above dimensions are reference values. Please contact JST for details.

Model number allocation

Contact

SVF - 01 T - 2.36 N

Supply form: Strip form

Series name

Type: Socket

Applicable wire range:
 N type: AWG #24 to AWG #20
 LN type: AWG #24 to AWG #18

Surface finish: Tin-plated

Applicable pin size

Auxiliary symbol: N···Normal type, LN···Low insertion type

Housing

S1 P - LV - P

No. of circuits: S1, 2, 3, 4, 5, 6
 Note: S1 is indicated only for single pin.

Type: Plug

Series name

Material: Blank···Modified PPE, P···PBT

Header

B 2 P - LV - TA - ■

Header type: Top entry type

No. of circuits

Assembly product

Series name

Pin shape and surface finish:
 TN···Hollow, nickel plated
 TA···Solid, tin-copper alloy plating
 with nickel undercoating

Color: natural

Crimping machine, Applicator

Contact	Crimping machine	Applicator	Crimp applicator with dies
SVF-01T-2.36N	AP-K2N	MK-L	APLMK SVF01-236N
SVF-01T-2.36LN		MKS-L	APLMK SVF01-236LN

Note: Contact JST for fully automatic crimping applicator.